

Gate/Garden/Post Top Lights



HL-2580



HL-2112



HL-2924



HL-2055 / HL-2040



HL-2620



HL-2560



HL-2530



Code No.	Width	Height	Extension	Installation Schematic/Base I.D	Description
HL - 2040	200ø	310	-	78ø	Cast Aluminium
HL - 2055	300ø	435	-	78ø	Lighting Fixtures,
HL - 2112	290	590	-	74ø	Stainless Steel
HL - 2530	290	490	-	74ø	Screws, Corrosion
HL - 2560	275ø	435	-	74ø	and UV Ray
HL - 2580	360ø	345	-	65ø	Resistant Coating,
HL - 2620	280	780	-	Figure - 15	Sand Blasted Glass
HL - 2924	335ø	500	-	63ø	Diffuser.


Note: HL-2580, HL-2560, HL-2924 - Spun Aluminium Top, HL-2924 Acrylic Diffuser, Rubber Gasket, Polycarbonate Reflectors, HL-2924-Lamp-2x11w CFL (TC-S)

• Use Lamp - GLS/Retrofit CFL • All sizes are in mm

HL-2923



HL- 2753

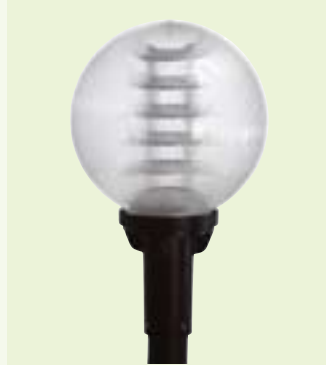

HL-2635



HL-2105



HL-2630



HL- 3LPB 2635



HL-2835



HL-2585



Code No.	Width	Height	Lamp	Installation Schematic/Base I.D	Description
HL - 2105	310	790	1x70w HPSV/MH or Retrofit CFL	71ø	Cast Aluminium Lighting Fixtures, Stainless Steel Screws, Corrosion and UV Ray Resistant Coating, Sand Blasted Glass Diffuser.
HL - 2585	355ø	240	1x GLS	72ø	
HL - 2630	275	515	1x GLS/Retrofit CFL	74ø	
HL - 2635	215	460	1x GLS/Retrofit CFL	Figure - 14	
HL - 2753	300ø	440	1x 11w CFL	52ø	
HL - 2835	640ø	350	1x 70w HPSV/MH	78ø	
HL - 2923	455ø	355	Retrofit CFL	63ø	
HL - 3LPB 2635	720	2625	3x GLS/Retrofit CFL	Figure - 9	

Note: \*HL - 2585 Spun Steel Lighting fixture, HL - 2753, 2105 - Polycarbonate Diffuser, HL - 2835 - Toughened Glass Diffuser, HL - 2923 - Acrylic Diffuser

• All sizes are in mm